

eNetCube - 03 - 02 - 03

- HTTP, JSON, REST API, MQTT CLIENT
- Motionsensor
- Standalone, no cloud registration
- Power supply directly via the network (PoE)
- Mounting on 1/4" tripod thread or top-hat rail (EN 60715)




IP 55

The **eNetCube-03-02-03 IP55** combines a **magnet sensor** and a **motion sensor with a passive infrared sensing** in a compact housing. This makes it ideal for applications such as **securing doors and windows or detecting movement in rooms and areas**.

Like all devices in the **eNetCube-series**, it can be operated either as a **standalone** unit or integrated into **control systems** - from industrial environments right through to smart home solutions (e.g. openHAB or Node-RED).

The integrated **network interface** handles both **communication** (HTTP, JSON REST-API, MQTT) and **power supply via PoE**. All system-relevant parameters can be conveniently configured in a web browser via the built-in **HTTP-Server**.

All software interfaces are consistently based on **open standards**. This means that the devices can be operated directly within the existing environment without the need for **registration, an app or a cloud connection** - ensuring **maximum data security and full control**.

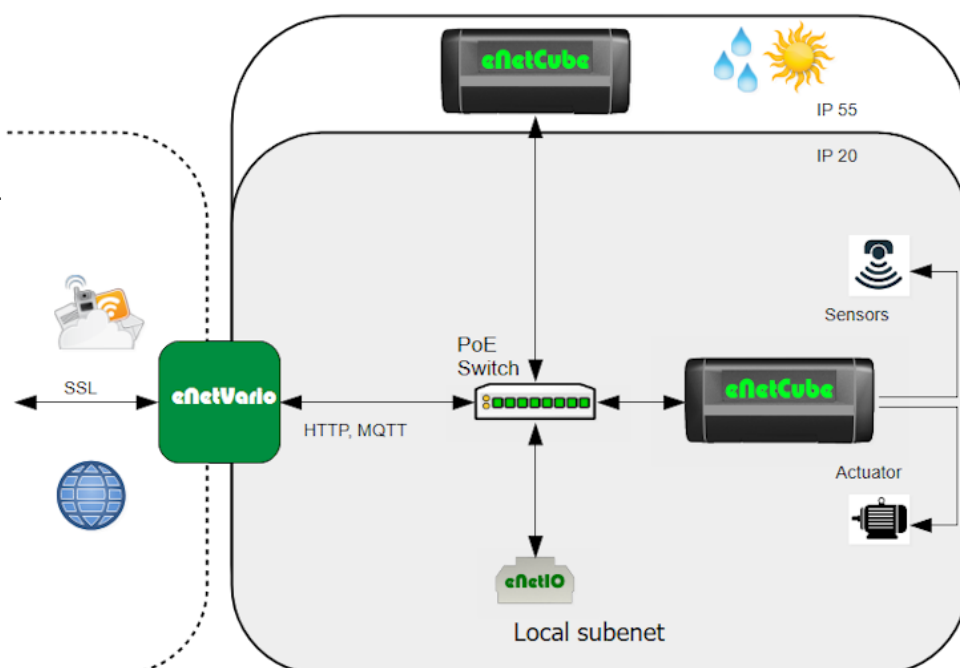

You can find more information about our products and services at www.enetcube.com



Case

- Robust and compact enclosure
- Mounting:
 - Top-hat rail mounting according to EN 60715
 - Tripod thread 1/4"-20
 - Stand
- IP code: IP55

Communication Interface

- RJ45, LAN Ethernet 10/100MBit
- M2M Kommunikation
- MQTT Client
- HTTP Homepage
- REST JSON-API

Other Interfaces

- 2 RGB-LEDs controllable with PWM

Power supply

- Power over Ethernet IEEE 802.3af

Sensors

- Magnet switch
- PIR motion sensor

Technical Data


Dimensions LxWxH [mm]	91 x 47.2 x 41	
Ambient temperature [°C]		
-Operation	min: 0	max: 50
-Storage	min: -40	max: 80
Air humidity [% r.H.]	min: 0	max: 90
Power supply		
-Network PoE	IEEE802.3af, Class 0	
-Voltage [V]	min: 18	max: 48
-power consumption [W]	typ: 0.5	max: 3.84
Magnet Switch		
Sensitivity [AT]	min: 10	max: 15
PIR Motion Sensor		
Aperture angle [°]	± 45	
Maximal distance [m]	5	




You can find more information about our products and services at www.enetcube.com



SYSTEMS
DEVICES
PROTOTYPES

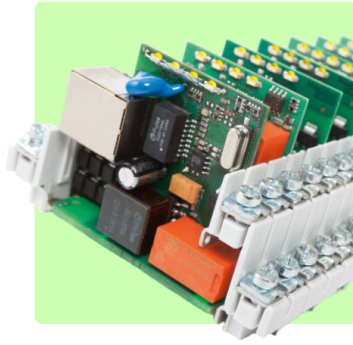

HARDWARE
SOFTWARE
DEVELOPMENT




develop

test

assemble

ASSEMBLY
SMD / THT
AOI



COMPETENCE
QUALITY
SERVICE

CONTROLLER
LINUX
NODE RED

EMBEDDED
MODULES
SENSORS

REMOTE IO
REST / MQTT
POE



You can find more information about our products and services at www.mkc-gmbh.com

MKC Michels & Kleberhoff Computer GmbH
42329 Wuppertal, Vohwinkeler Str. 58
Tel.: +49 / 202 / 27317-0
info@mkc-gmbh.de