



The quick guide provides the most important information on operating the eNetCube in a compact format.




Further descriptions can be found at www.enetcube.com

Package contents

- 1x eNetCube
- 1x Magnet
- 1x Quick Guide
- 1x Cover with thread



- 1x Pedestal



Delivery Status

Network, RJ45, 10/100 MBit	
IP-Address, IP-Mask ¹	DHCP (192.168.015.100 / 24)
mDNS-Address	Label
Administrator username ¹	user_su
Administrator password ¹	pass_su

Recycling

	To minimize its environmental impact, the product must be treated in accordance with European Directive 2012/19/EU in order to be recycled or dismantled. The user has the choice of returning the product to a competent recycling organization or to the retailer when purchasing a new electrical or electronic device.
--	--

Conformity


	CE Note: When used in a private environment, the product may cause electromagnetic interferences
	RoHS compliant
	REACH compliant

¹Changeable



You can find more information about our products and services at www.enetcube.com



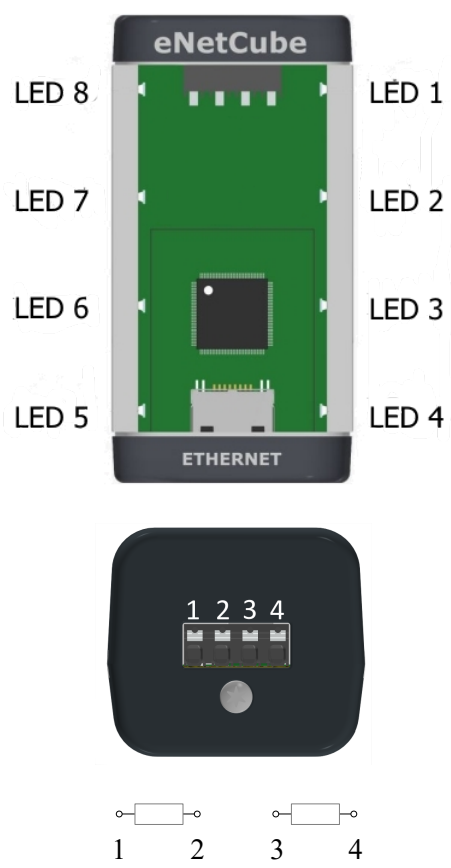

Safety note

Please read and follow the following safety instructions when using the appliance. We cannot guarantee that improper use of the appliance will not result in accidents or damage. Please use this product with care and at your own risk.

	Keep the device away from water, fire, moisture or hot environments.
	Do not attempt to disassemble, repair or modify the device.
	Do not use damaged cables with the device.
	Do not operate the device outside the device specifications.
	All work on all terminals must be carried out with the appliance switched off and de-energized.
	Dangerous voltages (e.g. mains voltage) may be present on the terminals of the eNetCube. touching these live terminals can lead to life threatening injuries.

Assembly

Before commissioning the eNetCube, ensure that it is securely positioned or fastened. The position of the device is freely selectable. The eNetCube can be mounted on a top-hat rail in accordance wit EN 60715. Alternatively, a stand and a cover with a 1/4" –20 UNC tripod thread are included with the device.

When installing the network cable and the control cables, make sure that they snap in the designated sockets. A screwdriver is required to disconnect the control cables. Use it to push in the white elements and pull on the cable at the same time.



You can find more information about our products and services at www.enetcube.com

