



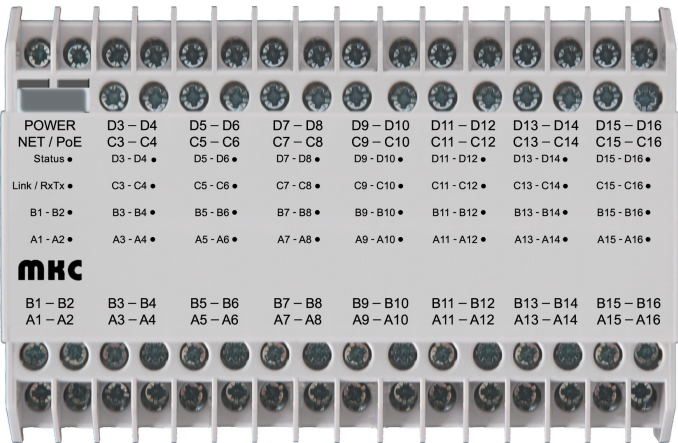

Package contents

- 1x eNetIO
- 1x Quick Guide
- 1x Magnet

The quick guide provides the most important information on operating the eNetIO in a compact format.



Further descriptions can be found at www.enetio.com

Delivery Status

Network, RJ45, 10/100 MBit	
IP-Address, IP-Mask ¹	DHCP (192.168.015.100 / 24)
mDNS-Address	Label
Administrator username ¹	user_su
Administrator password ¹	pass_su

Recycling

	To minimize its environmental impact, the product must be treated in accordance with European Directive 2012/19/EU in order to be recycled or dismantled. The user has the choice of returning the product to a competent recycling organization or to the retailer when purchasing a new electrical or electronic device.
--	--

Conformity

	CE Note: When used in a private environment, the product may cause electromagnetic interferences
	RoHS compliant
	REACH compliant

¹Changeable



You can find more information about our products and services at www.enetio.com



Assembly

Before commissioning the eNetIO, ensure that it is securely positioned or fastened. The position of the device can be freely selected. The eNetIO can be mounted on a top-hat rail according to EN 60715.

Any control and supply cables used must be fastened to the screw terminal provided for this purpose using a screwdriver (PZ2) before operation.

When installing the network cable, make sure that the plug snaps into the sockets.

	Do not connect a power cable to the POWER terminals when using a PoE power source.
--	--

Safety note

Please read and follow the following safety instructions when using the appliance. We cannot guarantee that improper use of the appliance will not result in accidents or damage. Please use this product with care and at your own risk.

	Keep the device away from water, fire, moisture or hot environments.
	Do not attempt to disassemble, repair or modify the device.
	Do not use damaged cables with the device.
	Do not operate the device outside the device specifications.
	All work on all terminals must be carried out with the appliance switched off and de-energized.
	Dangerous voltages (e.g. mains voltage) may be present on the terminals of the eNetIO. touching these live terminals can lead to life threatening injuries.

Digital outputs	
Quantity	29
Contacts	A1 - A2, A3 - A4, B3 - B4, C3 - C4, D3 - D4, A5 - A6, B5 - B6, C5 - C6, D5 - D6, A7 - A8, B7 - B8, C7 - C8, D7 - D8, A9 - A10, B9 - B10, C9 - C10, D9 - D10, A11 - A12, B11 - B12, C11 - C12, D11 - D12, A13 - A14, B13 - B14, C13 - C14, D13 - D14, A15 - A16, B15 - B16, C15 - C16, D15 - D16
Digital inputs	
Quantity	1
Contacts	B1 - B2



You can find more information about our products and services at www.enetio.com

