


eNetIO-4-acc

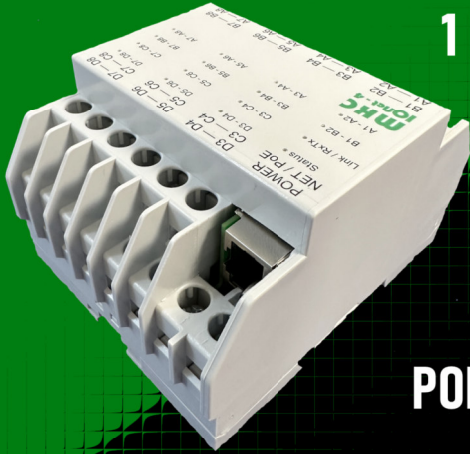


1 DIGITAL OUTPUT (RELAY)

13 DIGITAL INPUTS

REST API

MQTT CLIENT

POE or DIRECTLY POWERED

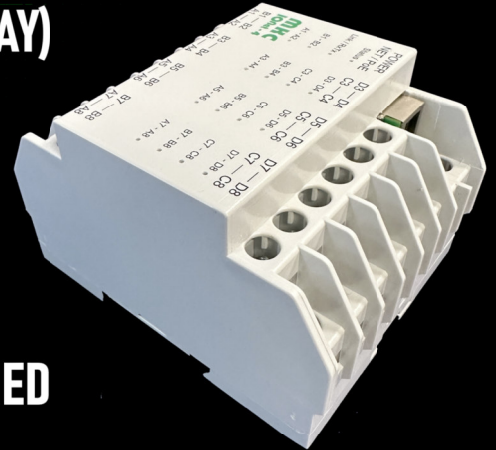

The eNetIO-4-acc provides you with an output in the form of a relay normally open contact and thirteen electrically isolated inputs.

It works both stand-alone and integrated in control systems in industry or in the home user area (e.g. openHAB, Node-Red).


The device is an independent part of a whole series, for the connection of different sensors and actuators for industrial applications and the private environment.

The network interface is used for communication (HTTP, JSON REST-API, MQTT) as well as for power supply of the device via PoE.

The integrated HTTP server enables convenient setting of all system-relevant parameters.

All software interfaces are based on open protocols.

Thus, all devices can be operated directly in your network environment without registration, app or cloud connection. This offers the highest possible protection for your data.

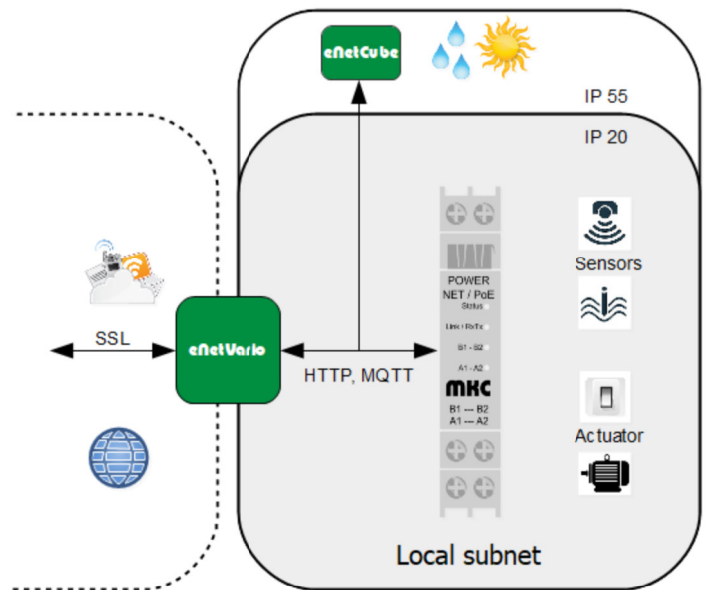

You can find more information about our products and services at www.mkc-gmbh.de



Case

- Robust and compact enclosure for top-hat rail mounting according to EN 60715

Galvanic isolation

- The device is completely galvanic decoupled from the power supply and from the sensors and actuators connected to the screw terminals.

Communication interface

- RJ45, LAN Ethernet 10/100MBit
- M2M Communication
- MQTT Client
- HTTP Homepage

Power supply

- Network, PoE
- Alternatively 18 - 48V DC (protected against polarity reversal)

13x digital inputs

- Sampling interval: ca. 2ms
- Weighted arithmetic mean as input filter
- LED status indicator

1x digital output

- Configurable as mono/bistable switch
- LED status indicator

Technical specifications


| | | |
|--|--|-----------------|
| Dimensions LxWxH [mm] | 90 x 35 x 60 | |
| Ambient temperature [°C] | | |
| - Operation | min: 0 | max: 50 |
| - Storage | min: -40 | max: 80 |
| Air humidity [% r.H.] | min: 0 | max: 90 |
| Power supply | | |
| - Network PoE | IEEE802.3af, Class 0 | |
| - Voltage [V] | min: 18 | max: 48 |
| - power consumption [W] | typ: 0,5 | max: 3,84 |
| Digital inputs | | |
| Quantity | 13 | |
| Contacts | B1 – B2, A3 – A4, B3 – B4, C3 – B4, D3 – D4, A5 – A6, B5 – B6, C5 – B6, D5 – D6, 73 – A8, B7 – B8, C7 – B8, D7 – D8 | |
| V _{IH} | min: 12V AC/DC | max: 230V AC/DC |
| V _{IL} | | max: 6V AC/DC |
| Input resistance | ≥ 50KΩ | |
| Galvanic isolation | ≥ 3KV | |
| Wire cross-section [AWG] | min: 24 | max: 16 |
| Digital outputs | | |
| Quantity | 1 | |
| Contacts | A1 - A2 | |
| Implementation | Relay, normally open | |
| Rated voltage | | max: 250V~ |
| Switching voltage | | max: 440V~ |
| Breaking capacity | | max: 1500VA |
| Rated current | | max: 6A |
| Galvanic isolation | ≥ 3KV | |
| Wire cross-section [AWG] | min: 24 | max: 16 |
| Contact ratings [cycles] (VDE0660, VDE0631, UL508) | - 1x10 ⁵ with 6A & 250V~ - 5x10 ⁵ with 6A (resistive) & 30V= - 3x10 ⁶ with 0,3A (L/R=40ms) & 50V= | |




You can find more information about our products and services at www.mkc-gmbh.de



SYSTEMS
DEVICES
PROTOTYPES

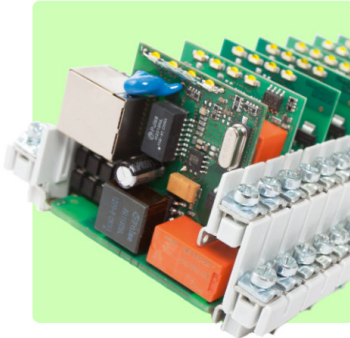

HARDWARE
SOFTWARE
DEVELOPMENT

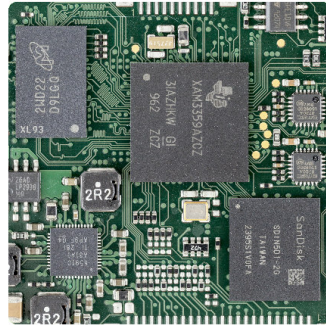

ASSEMBLY
SMD / THT
AOI



develop

assemble

COMPETENCE
QUALITY
SERVICE

CONTROLLER
LINUX
NODE RED

EMBEDDED
MODULES
SENSORS

REMOTE IO
REST / MQTT
POE



You can find more information about our products and services at www.mkc-gmbh.de

MKC Michels & Kleberhoff Computer GmbH
42329 Wuppertal, Vohwinkeler Str. 58, Germany
Tel.: (+49) 0202 / 27317-0, Fax: (+49) 0202 / 27317-49
info@mkc-gmbh.de